




3.5" SCSI Solid State Drive

Commercial Temperature

Operating Temperature Range: 0C to +70C

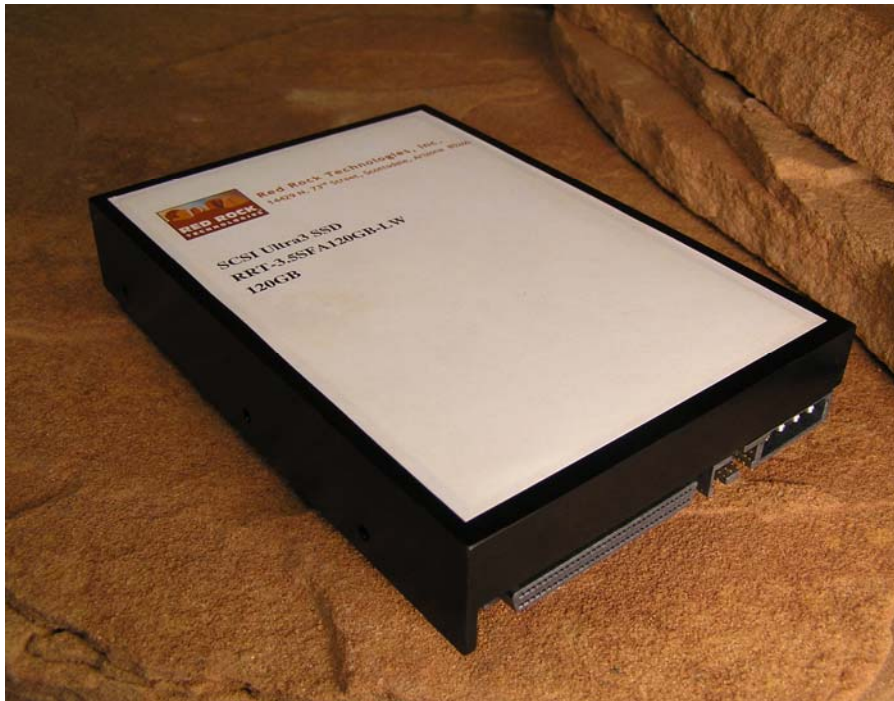

Model RRT-35SFA-LW 3.5" SCSI SSD

Offers solid state, drop-in replacement for 3.5" mechanical hard drives.

Provides a transparent interface from the SCSI bus to solid state drive.

Capacity of up to 120 GB in 3.5" form factor.

Ultra SCSI interface supports 8-bit narrow/16-bit wide, single ended SE/ low voltage differential LVD modes.

Red Rock Technologies' 3.5" SCSI SSD features:

- Fast, efficient field replacement.
- Ideal for extreme shock & vibration environments.
- Lower power consumption than mechanical hard drive equivalent.
- High density mass storage in 3.5" form factor.
- 35% lighter than standard 3.5" SCSI drive.
- Compatible with all CPU's with a SCSI controller.
- No additional software required.
- SCSI termination can be enabled within unit.
- SCSI ID selection 0 – 15.

SPECIFICATIONS

3.5" SCSI SSD Specifications

Capacity:	Up to 120 GB
Interface:	Ultra SCSI interface compatible with any SCSI controller. Supports wide/narrow and single ended (SE)/low voltage differential (LVD) modes.
Throughput, Continuous	37 MB/S, 37 MB/S.
Sector Size:	512 Bytes
Power: +5 VDC (+/- 5%)	0.7 A typical, 1.0 A Max.
Environment:	
Ambient Temperature	
Operating	0° to 70° C
Operating (Optional)	-40° to 85° C
Non-operating	-40° to 85° C
Relative Humidity	
Operating	8% to 95%
Non-operating	8% to 95%
Shock (operating and non-operating)	50g peak, MIL-STD-810F, Method 516.5 Procedure I
Vibration (operating and non-operating)	16.3 gRMS, MIL-STD-810F, Method 514.5, Procedure I.
Altitude	
Operating	80,000 feet
Reliability	
MTBF for base module	Estimated 160,000+ hours @ 25° C
MTBF for onboard SSD	Estimated 3,000,000 hours @ 25° C
Weight:	16 oz. Max.
Electrical Rating:	Designed to meet UL requirements.

Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate, however, no responsibility is assumed for inaccuracies. "Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc. © Copyright 2010 Red Rock Technologies, Inc. All rights reserved. (Rev. 05/04/2010)