

VME P2 SATA Adapters


I/O adapters that provide SATA interface to Red Rock VME SATA products on VME 3-row or VME64 5-row backplanes. Single board computer (SBC) connects SATA cable from SBC backplane adapter to Red Rock VME SATA P2 adapter.

FEATURES INCLUDE

- Low cost way to route SATA signals from Red Rock VME SATA product to SBC
- Support for 3 SATA interfaces with standard SATA connectors

Part # options:

P2IO-06 – 3-Row VME DIN connector

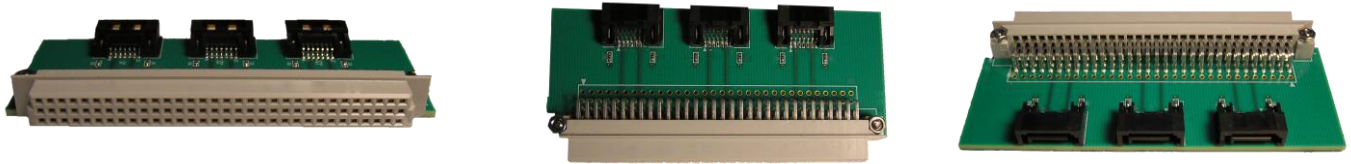

P2IO-07 – 5-Row VME64 DIN connector



VME P2 SATA Adapter Specifications

Reliability	
MTBF - Drive Carrier	3 million hours
Environmental	
Temperature Operating	-40° to 85°C
Temperature Storage	-50° to 95°C
Relative Humidity	5% to 95%
Altitude	80,000 feet (24,000 meters)
Physical	
Dimensions	3.93" x 1.88" (9.98 cm x 4.78 cm)
Weight	2 oz. max (57g)

Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate, however, no responsibility is assumed for inaccuracies.

"Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.

© Copyright 2016 Red Rock Technologies, Inc. All rights reserved. (Rev.09/09/2016)

